


The PS6K is the perfect power sequencer for those small-sized installation or touring applications requiring a safe and stable power distribution with the maximum installation flexibility. With a maximum output current of 25A distributed on 6 power output sockets (3 channels) and it's optional remote sequence activation the PS6K can safely power up all the equipment on your audio setup.

## Features

- Installation on rack, wall or standalone.
- Maximum output current of 25A.
- 6 power output sockets (3 channels).
- Circuit breaker for short-circuit and overload protection.
- Power on, sequence on and channel on LED indicators.
- 1 second sequencing time lapse.
- Remote sequence activation.

## Applications

- KTV audio system power distribution.
- Suitable for small sized installation/touring applications.

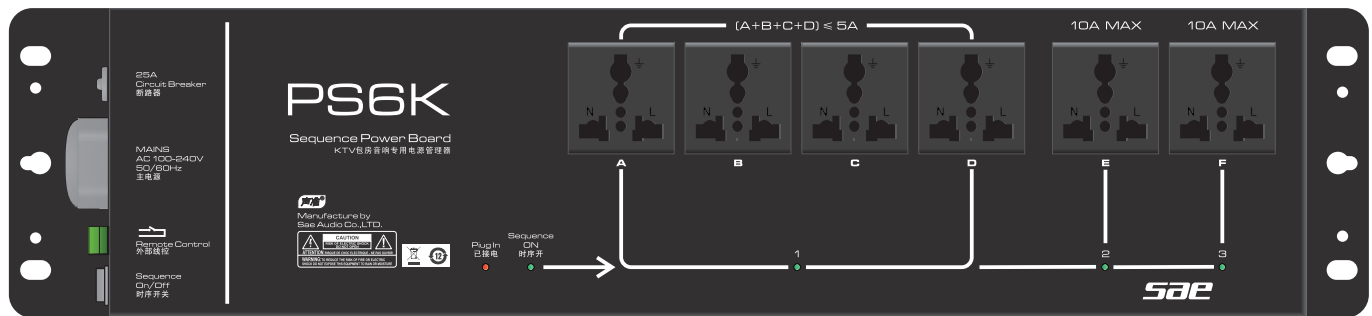

PS6K

## Specifications

**Model** PS6K


### Power Specifications

Limited main power	~100-240V/25A
Consumption power	≤7W(without output loads),≤1W when standby
Wiring connection	Power Cable fixed on the left side board, internal wiring connection
Short-circuit and overload protection	Circuit breaker works when Short-circuit or over-load
Sequence channels	3 ways 6 power sockets with protection cover
MAX Output current	A+B+C+D< 5A, E/F< 10A. Totally max output current is 45A
Sequence control method	Controlled by the ship type switch, or by an external controller
Sequence distance	1step/s
Working voltage	100V~240V ±10%
Working frequency	50/60Hz ±5%


### Dimensions/Weight

Product dimensions (mm)	483 x 110 x 45
Packing dimensions(mm)	530 x 155 x 65
Weight	4kg

### Dimensions (mm)

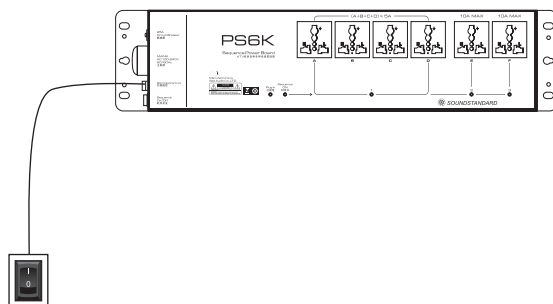

REMOTE CONTROL

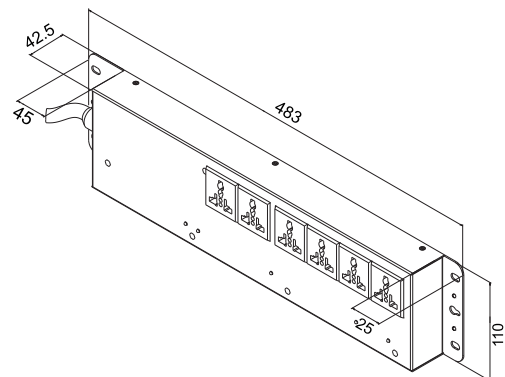

PS6K

SAE reserves the right to make any changes to the product specifications without prior notice. Final specifications to be found in the user manual.

■ No. 39 WenJiao Road East, HeShun, NanHai, FoShan, GD, China. ■ TEL: +86 - 757 - 8512 - 9007 ■ FAX: +86 - 757 - 8568 - 8191